


A - SMARTPACK OTR RETREADING

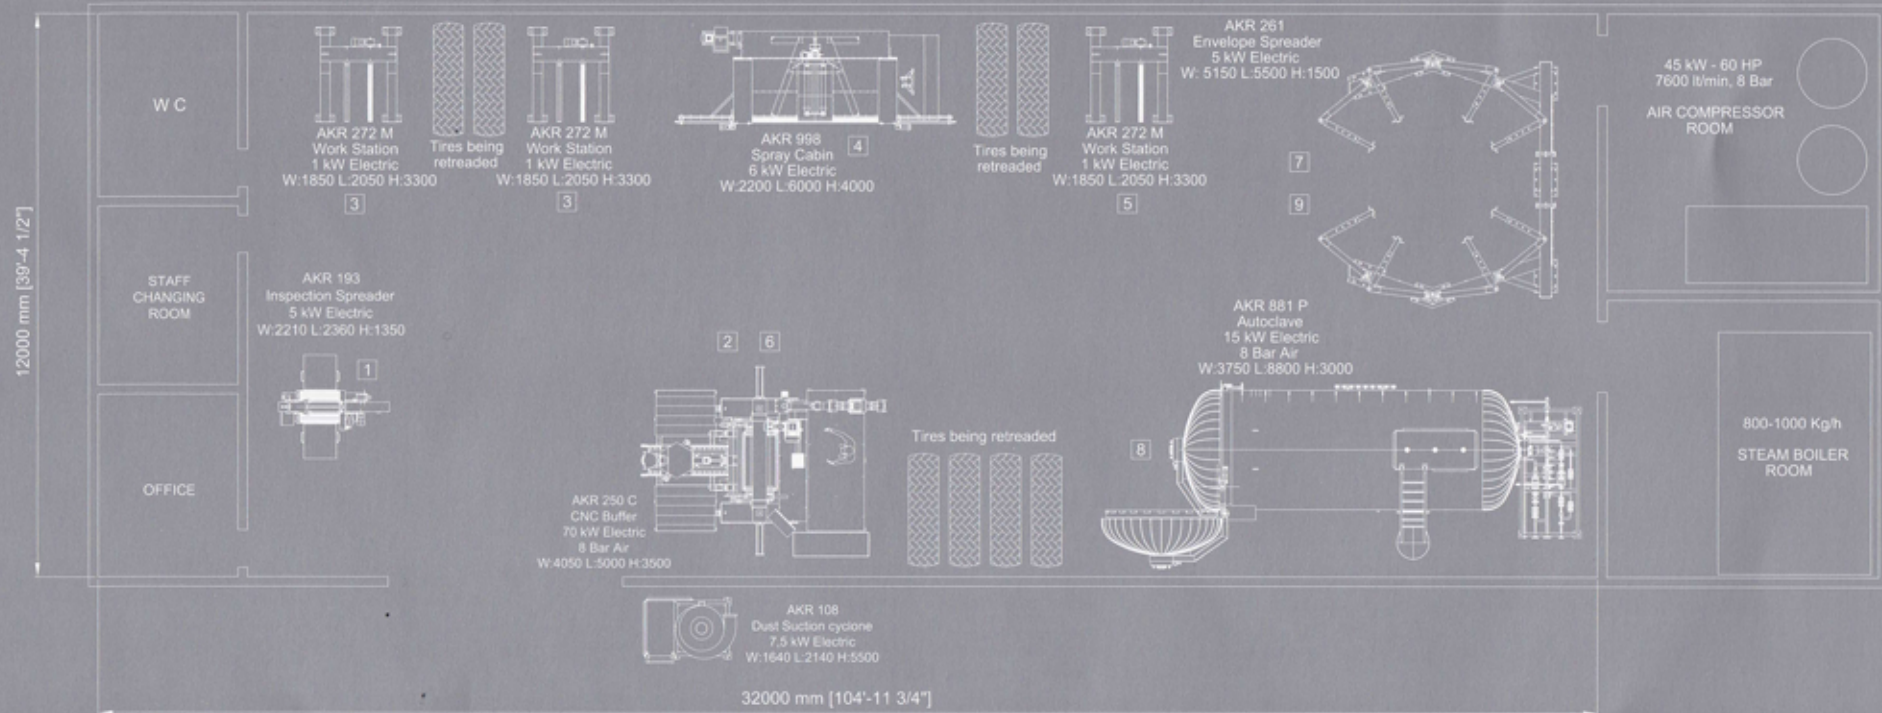

THE OTR TIRE RETREADING STEPS

- 1- INSPECTION (AKR 193)
- 2- PEELING & BUFFING (AKR 250 C)
- 3- SKIVING (AKR 272 M)
- 4- CEMENTING (AKR 998)
- 5- FILLING (AKR 272 M)
- 6- PRECURED TREAD APPLICATION (AKR 250 C)
- 7- ENVELOPING (AKR 261)
- 8- CURING (AKR 881 P)
- 9- REMOVING ENVELOPE (AKR 261)

The Tire Ranges to be Retreaded: 12.00 R 24" - 18,4 R 34"