


# TYRE RETREADING - GRINDING STONE & CUTTING TOOLS



## WHITE OXIDE GRINDING STONES

Order No.	Description	Max. RPMS
300-01	MINI- PENCIL STONE, 7/16", (10.5 mm) dia.on 1/8" (3 mm) shaft	30,000
300-03	PENCIL STONE, 1 1/16", (25 mm) dia. on 1/4", (6mm) shaft	47,000
302-03	MUSHROOM STONE, 1 1/4", (30 mm) dia. on 1/4", (6mm) shaft	30,500
302-05	MUSHROOM STONE, 1 5/8", (40 mm) dia. on 1/4", (6mm) shaft	23,500
305-01	CONICAL STONE, 1 1/8", 13 mm x 1/4" (20 mm) wide on 1/4" (6 mm) shaft	33,500


Aluminium oxide stone for radial tyre. Use in a high speed grinder to trim and remove all loose steel wire cord ends around a tyre injury.

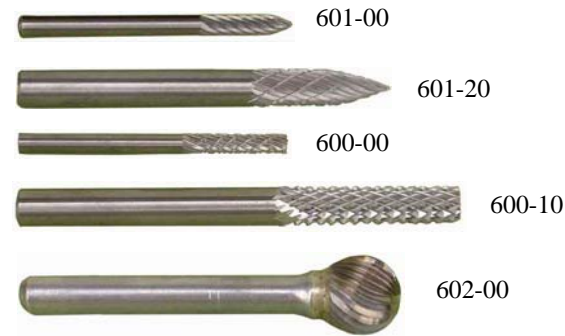

## CARBIDE CUTTERS

Order No.	Description	Shaft Size
601-00	MINI-POINTED CARBIDE BURR 1 1/4" (30 mm) length	1/8" (3 mm)
601-20	POINTED END CARBIDE BURR 2" (50 mm) length	1/4" (6 mm)
600-00	MINI-POINTED CARBIDE BURR 1 1/2" (40 mm) length	1/8" 3 mm
600-10	ROUTER CARBIDE BURR 2 1/2" (65 mm) length	1/4" (6 mm)
602-00	BALL-SHAPED CARBIDE BURR 2 3/4"(70 mm) length, 3/4"(20 mm) dia	1/4" (6 mm)

To remove excess rubber and smooth jagged steel wire in repair areas. Use with high speed buffer tool 20,000 to 30,000 RPM.

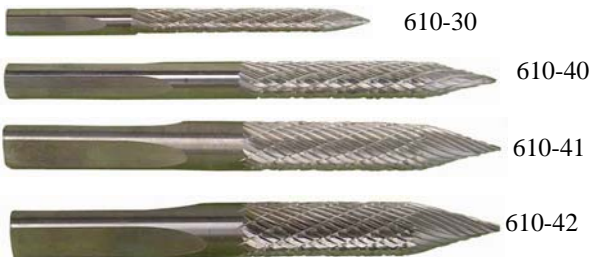

## DIAMOND-CUT BURRS & ROUTERS

Order No.	Description	Injury Size
610-30	CARBIDE CUTTER 3" (75 mm) length	1/8" - 3/16" 3 - 5 mm
610-40	CARBIDE CUTTER 4" (100 mm) length	1/4" - 5/16" 6 - 7 mm
610-41	CARBIDE CUTTER 4 9/16" (120 mm) length	3/8" - 7/16" 9 - 10.5 mm
610-42	CARBIDE CUTTER 4" (100 mm) length	1/2" 13 mm

To remove damaged steel cables and loose wire in radial tyres to minimize the size of the injury. Use with low speed buffer tool, maximum 1200 rpm.

## ROTARY GOUGERS



Provides fast bulk removal of rubber. Ideal for removing around repair.

Order No.	Description	
620-01	Micro Rotary Gouge, 3/4", 20 mm 3/8", 9 mm threaded arbor hole	4 per box
620-00	Mini Rotary Gouge 1 1/4", 30 mm 3/8", 9 mm arbor hole	3 per box
620-10	Rotary Gouge 2", 50 mm dia. 1/2", 15 mm Arbor Hole	1 per box