


# TRUCK TIRE BUFFERS

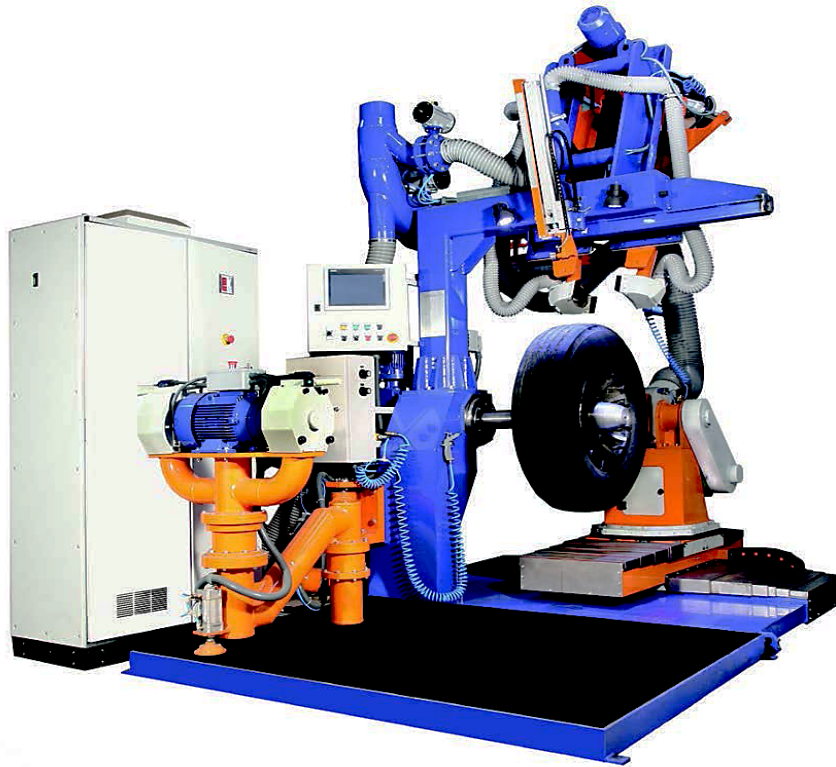

**MODEL: AKR240HCX**  
**CNC BUFFER**

## TECHNICAL SPECIFICATION

Buffing Range: 7.50 R 15 - 12.00 R 24  
Minimum Tire Diameter: 700mm (27.5")  
Maximum Tire Diameter: 1450mm (57")  
Maximum Tire Width: 500mm (19.6")

## TECHNICAL FEATURES

Fully computerized CNC controlled buffing machine with expandable hub and rim system  
User friendly easy operation Easy and user friendly tire loading/unloading mechanism  
Programmable tire buffing receipts  
Suitable for truck tires up to 445/65 R 22.5 and 495/45 R 22.5  
Buffing capability of BIAS and Radial tires

## OTHER SPECIFICATIONS

Total power: 45kW (including optional)  
Working pressure: 8 bar (120psi)  
Capacity: 30-35 tyres/hour  
Weight: 4000kg (8800lbs)  
Dimensions: 4450 (W) x 3000 (L) x 2750 (H)mm/  
175" (W) x 118" (L) x 108" (H) mm  
CE Certified

## HARDWARE & CONTROL FEATURES

Buffing head R115 Convex with water cooling  
High quality and well-known equipment for pneumatic, linear and control systems  
Highly sensitive computerized circumference measuring system and magnetic wire sensor  
Expandable rim: 20-22.5x9" included (other sizes are optional)  
Manual arm for buffing and brushing (Optional)  
Automatic sidewall brushing (Optional)  
12" color panel screen and touch pad panel  
Remote access to PLC via internet



No. 27, Jalan 7/3, Taman Industri Selesa Jaya, 43300 Balakong, Selangor Darul Ehsan, Malaysia.

LIEW KOON MARKETING SDN. BHD. Tel: 6 03-8962 3163 & 8962 3168 Fax: 6 03-8962 2311 E-mail: sales@liewkoon.com.my Web: www.liewkoon.com

