


TRUCK TIRE BUFFERS

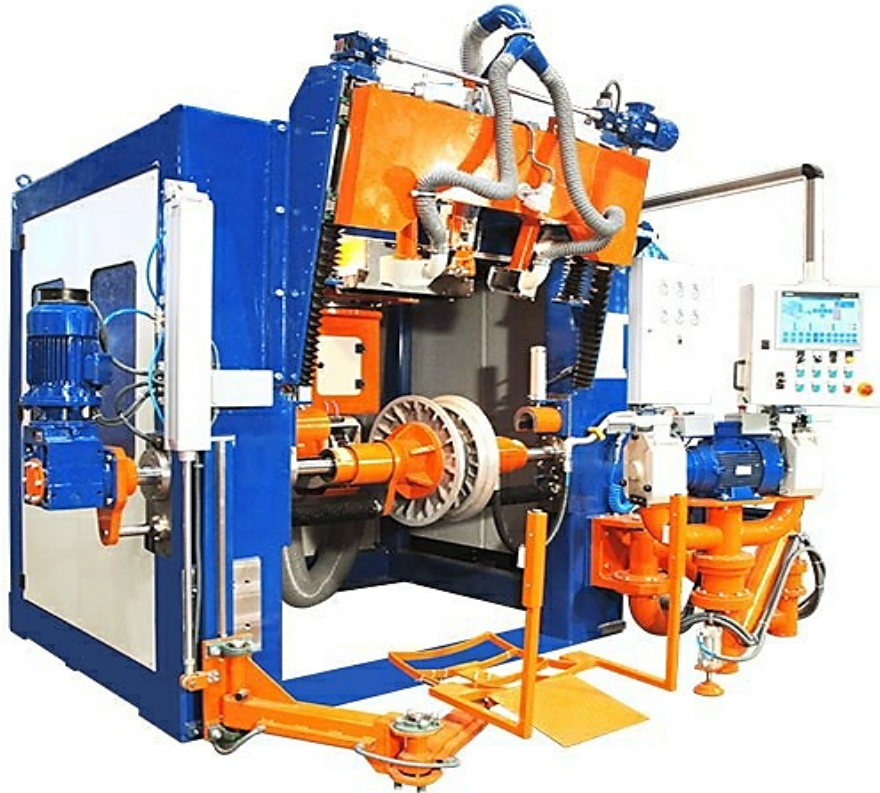

MODEL: AKR240C
CNC BUFFER

TECHNICAL SPECIFICATION

Buffing Range: 7.50 R 15 - 12.00 R 24
Minimum Tire Diameter: 700mm (27.5")
Maximum Tire Diameter: 1450mm (57")
Maximum Tire Width: 500mm (19.6")

TECHNICAL FEATURES

Fully computerized CNC controlled buffing machine with bead plates and automatic sidewall brushing
User friendly easy operation Easy and user friendly tire loading/unloading mechanism
Programmable tire buffing recipes
Suitable for truck tires up to 445/65 R 22.5 and 495/45 r 22.5
Buffing capability of BIAS and Radial tires

OTHER SPECIFICATIONS

Total power: 45kW (including optional)
Working pressure: 6 bar (90psi)
Capacity: 30-35 tyres/hour
Weight: 4500kg (9.920lbs)
Dimensions: 2760 (W) x 3800 (L) x 3500 (H)mm/
108" (W) x 150" (L) x 137" (H) mm
CE Certified

HARDWARE & CONTROL FEATURES

Buffing head R115 Convex with water cooling
High quality and well-known equipment for pneumatic, linear and control systems
Highly sensitive computerized circumference measuring system and magnetic wire sensor
Bead plates included: 14"-15", 16"-17.5", 19.5", 20"-22.5", 24"
Manual arm for buffing and brushing (Optional)
12" color panel screen and touch pad panel
Remote access to PLC via internet



劉坤貿易有限公司
LIEW KOON MARKETING SDN. BHD.

No. 27, Jalan 7/3, Taman Industri Selesa Jaya, 43300 Balakong, Selangor Darul Ehsan, Malaysia.

Tel: 6 03-8962 3163 & 8962 3168 Fax: 6 03-8962 2311 E-mail: sales@liewkoon.com.my Web: www.liewkoon.com